



92798 Cape Arago Hwy
Coos Bay, OR 97420
Phone (541) 888-3517
Fax (541) 888-4846
www.kksound.com

BANJO TWIN

Thank you for buying the *Banjo Twin*. This pickup system is designed to reproduce the true banjo sound with very natural tone quality and with very little effect on the acoustic tone.

The *Banjo Twin* does not require any alteration of your valuable instrument; all the components are installed with special double side tape or self-adhesive fasteners. These will not harm the finish of your instrument and residues can be removed with WD40.

The *Banjo Twin* works well in passive mode; if a preamp should be necessary we recommend our *Pure Preamp* or the *Powerpack Preamp*.


Please install the system as shown in the photos using the supplied double stick tape for the pickups. **Watch the orientation of the pickups and the exact distance from the bridge feet** – it is different on either side! (See upper photo.) Secure the two pickup cables on the rod with the supplied cable tie.

Please note that the tape is installed to the two outer edges of the pickups only. We call this the “Katamaran mounting technique.” Using this technique, the center portion of the pickup is free-floating, which enhances response while reducing the adhesive surface by about 40%.

The *Banjo Twin* system is equipped with a multi-use endpin jack. This jack is designed to be installed on the outside of the banjo (see upper photo) but it also allows for internal installation or for installation in a slot of the outer rim (see photo below).

The external-mount jack (middle photo) is attached with K&K’s self-adhesive dual-lock system (similar to Velcro but much stronger). It can be indefinitely opened and closed without wear and tear and guarantees super holding power with absolutely no mechanical noise. In this way, the jack can be temporarily removed to fit your instrument into a form-case.

If drill-thru jack installation (endpin jack) is desired, please contact your luthier. This installation requires special tools and skills. For the rim-slot installation, please remove the strap knob assembly (knob-nut-washer) and remove the nut in front of the screw cap. Use the supplied washer and mount the jack like show on the lower photo. In both latter cases please remove the “dual lock” fastener and the black plastic underneath it.

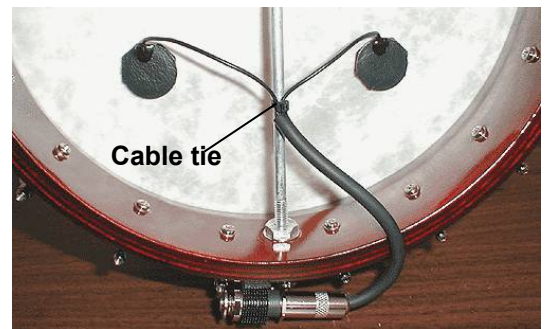

Technical Data:

Cable length: 10"
Pickup size: 27 mm diameter
Impedance: High ohmic
Jack: Stereo TRSS endpin jack wired mono