


PRODUCT MANUAL


HOT HARMONICA

Please install the Hot Harmonica according to the illustrations.

Suggested installation for small harmonicas:
Outside on the metal casing.

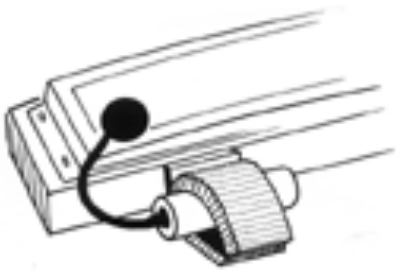

Suggested installation for bigger harmonicas:
Inside the instrument on the reed block.

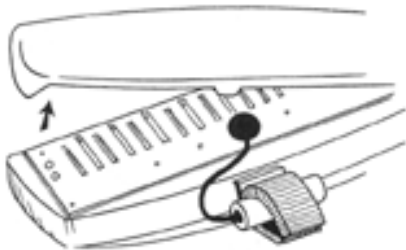

ABOUT THE DUAL-LOCK JACK ATTACHMENT

Dual-lock has a very strong adhesive. If your instrument has a delicate finish, we recommend you stick a piece of masking tape to the instrument first and then place the dual-lock on the tape. If possible, you should choose a location like a tail piece that is made up of sturdier material.

When dual-lock is removed from the instrument, it may leave a dark residue on the instrument. This residue can easily be removed with NAPTHA (a solvent available at hardware stores) or WD-40. It can also be rubbed off with your fingers. Never use acetone, paint thinner, or similar harsh solvents! Please test any solvent you use on a small, hidden area of your instrument first to make sure it doesn't damage the finish. Most lacquered surfaces withstand NAPTHA or WD-40 without a problem but very old instruments or thinly varnished instruments may be vulnerable.